



MICROMAX 8


This MicroMax features one subwoofer and one column speaker. Two configurations are available :

- 2 amplified subwoofers CBA-12M and 2 column speakers CLA-88
- or**
- 1 stereo subwoofer CBA-12S and 2 column speakers CLA-88

This is THE product for events requiring high quality sound with small dimensions products.

CLA-88 Column Speaker 8 x loudspeakers 3"

- 350W / 8 Ohms (DSP preset)
- 4 or 16 Ohms on request
- Bandwith (-6dB) : 250 Hz to 18 kHz
- Directivity : 60° H x 30° V
- 2 Speakon 4 pin connectors
- 1 Phoenix 4 pin connector
- 1 fixing point for safety cables
- 4 fixing points on the rear for a wall ball (ball on request)
- 2 fixing points M10 (top and bottom)
- Made of extruded aluminium and aluminium sheets
- Powder Coated black or white
- Dimensions : H 770 x D 87 x L 123 mm
- Weight : 4.2 Kg

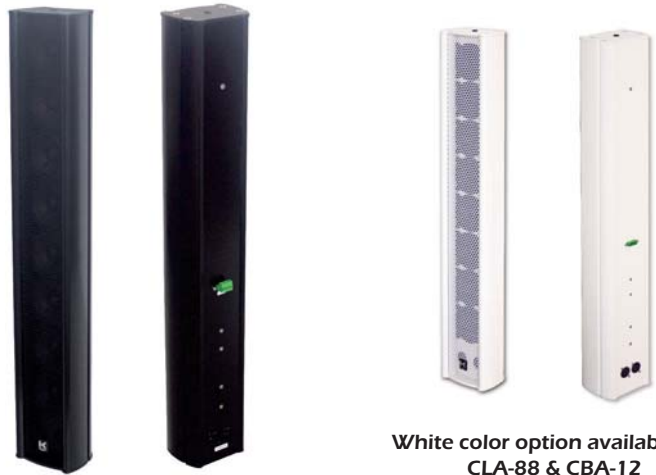

White color option available for
CLA-88 & CBA-12

CBA-12 12" Amplified subwoofer

- LF : 1 x 12" double wave loudspeaker
- Pascal Audio amplifiers for subwoofer and column speakers
- DSP 30 presets + USB port + LCD display
- Power supply : 2 x Powercon In/out
- Polyurethane lacquer finish
- Dimensions : H 445 x D 430 x L 450 mm
- Weight : 30 Kg

CBA-12M, Mono Version, amplified 2 ways, 1000W + 250W
- Column connectors : 2 x speakon 4 pin connectors in parallel

CBA-12S, Stereo Version, amplified 3 ways, 1000W + 2 x 250W
- Column connectors: 2 x speakon 4 pin connectors



FC-2CBA12/CLA88

On request, flight case for 2 x CBA-12 and 2 x CLA-88
H 640 x D 1050 x L 880 mm – Weight : 44 kg / 0.59 m3

Caractéristiques DSP-24




DSP-24	
Inputs	
Inputs	2
PEQ - low/highShelf	8
Graphic Equalizer	NO
Reverse Phase	YES
Delay	0 - 20 ms
Outputs	
Outputs	4
GAIN	-40 to 12
PEQ - low/highShelf	8
Reverse Phase	YES
Delay	20 ms
Compressor	NO
Treshold (step 1dbu)	-20 to 20
Attack time (ms)	1/2/5/10/20/50/90
Release time	x2/x4/x8/x16/x32
High Pass	Butterwoth / Bessel / Linkwitz Riley (-12/-18/-24/-48)
Low Pass	Butterwoth / Bessel / Linkwitz Riley (-12/-18/-24/-48)



Integrated DSP, 30 presets + USB port + LCD display
- Software for Windows



Frequency response and directivity of CLA-88 column speaker

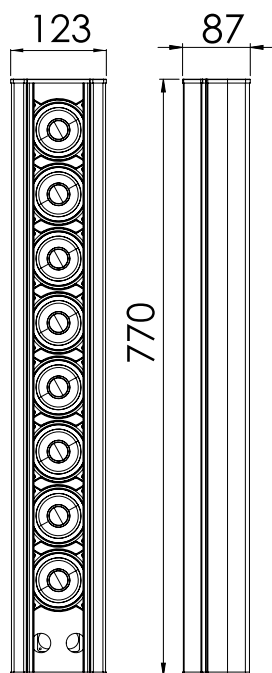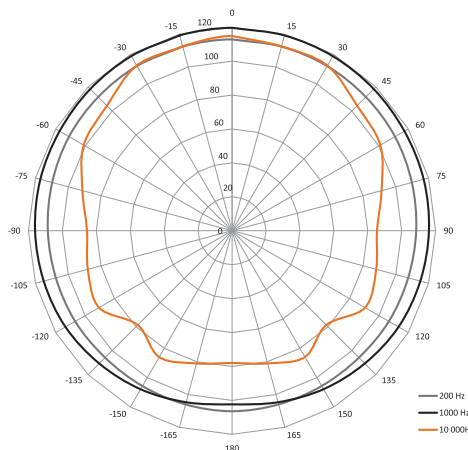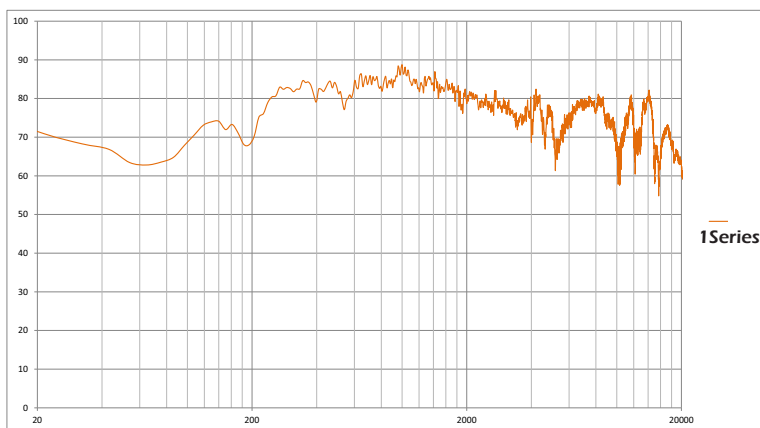

Dimensions in mm

